


Rev #	Date	By	Description

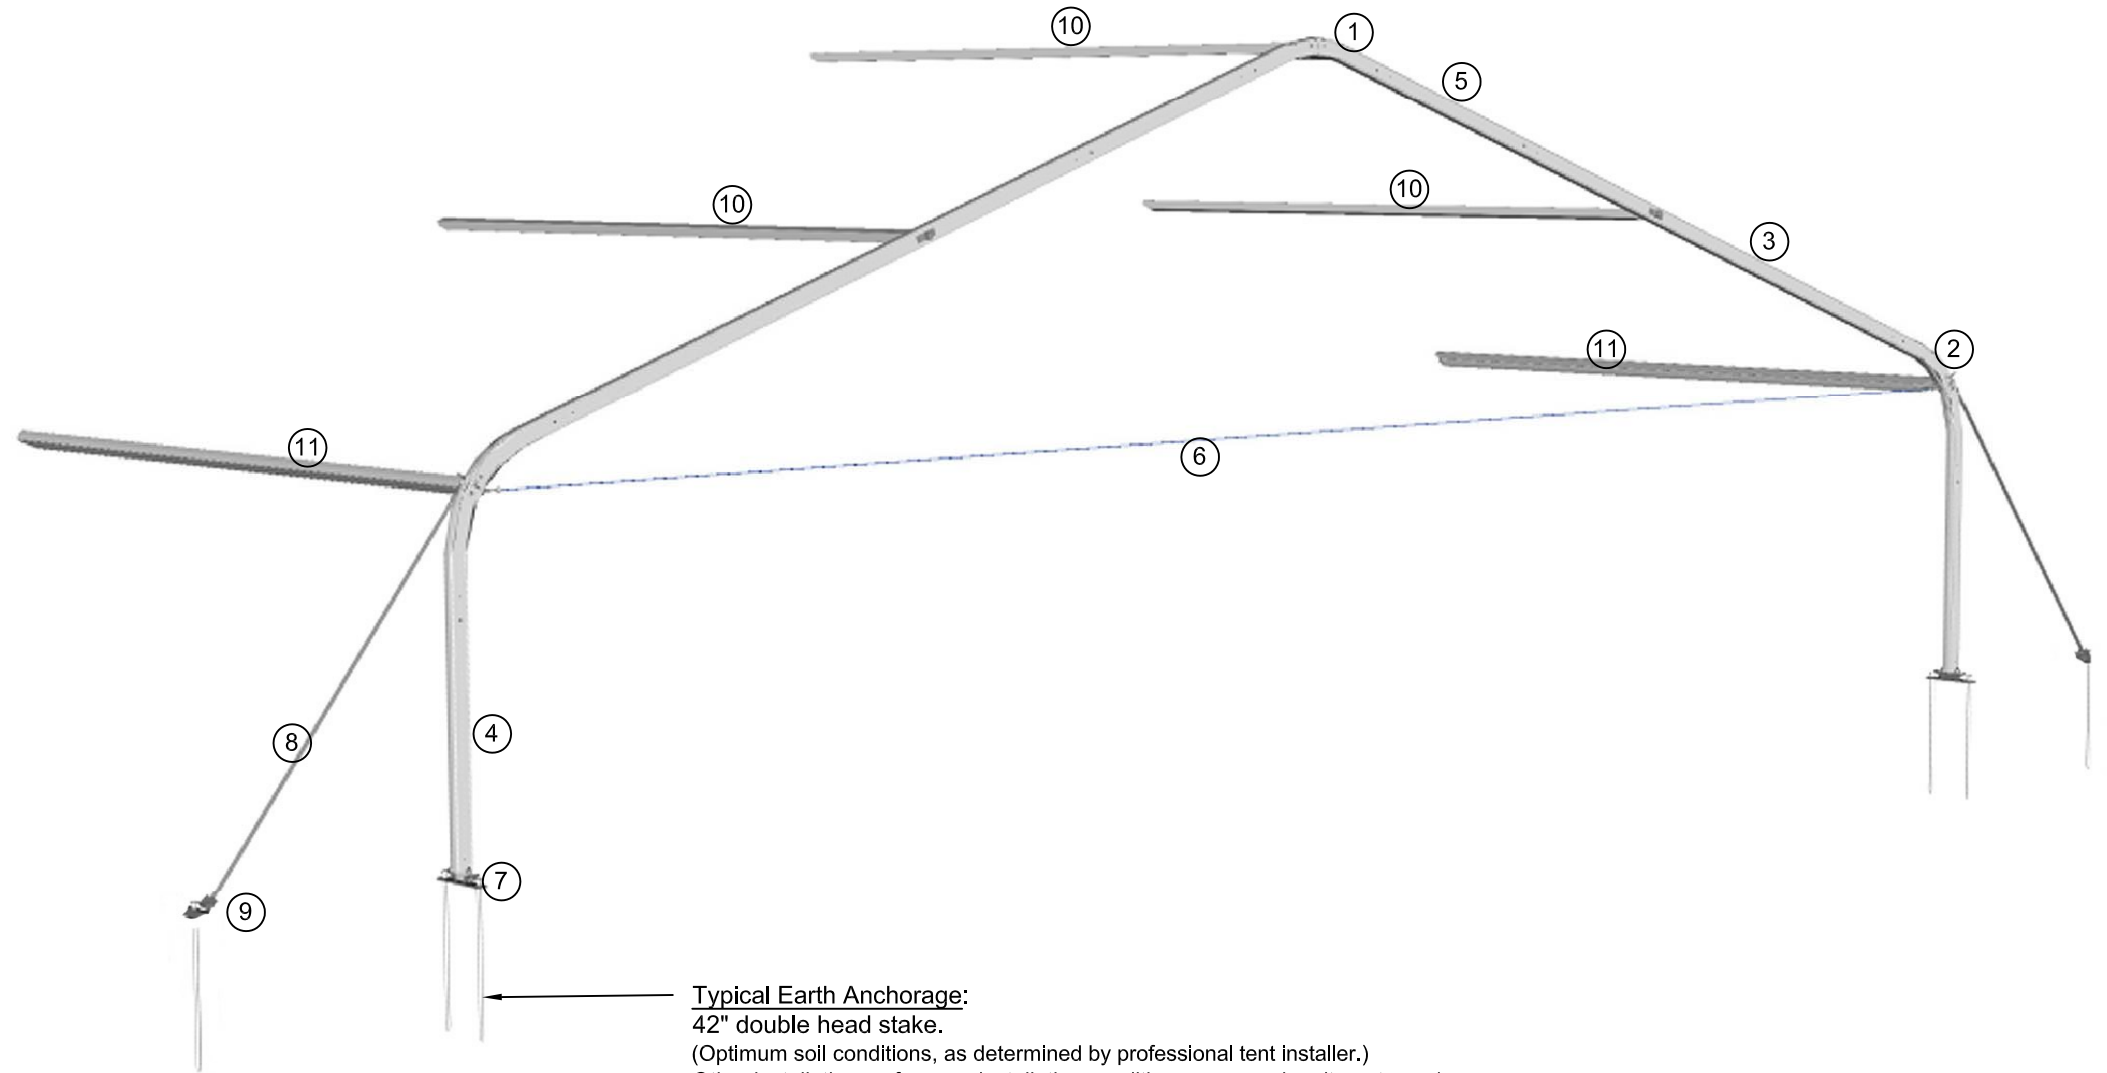

Typical Earth Anchorage:  
 42" double head stake.  
 (Optimum soil conditions, as determined by professional tent installer.)  
 Other installation surfaces or installation conditions may require alternate anchorage.  
**If in doubt, consult local engineer.**

ITEM #	PART #	QTY.	Um	DESCRIPTION	WEIGHT
1	30.73.003.v1	1	1	APEX TS ASSY STND	31
2	30.73.002.v5	2	1	HIP TS ASSY 8 FLARE - 2 SLEEVES	63
3	30.73.005.v1	2	1	BEAM TS 188.43 IN ASSY 2.0 IN BRACKET	93
4	20.60.003	2	1	BEAM TS 67.0 in MACHINED EXT	31
5	30.73.035	2	1	BEAM TS 134.125 in ASSY 24 IN SLEEVE	75
6	30.73.034	1	1	CABLE HORIZONTAL (BLACK) TS60	8.8
7	30.73.000.v1	2	1	BASE TS HINGE ASSY 1.25 IN HOLES	27
8	30.16.210	2	1	STRAP 2 IN X 168 IN WITH SAFETY HOOK	5.9
9	30.73.020	2	1	ANCHOR WINCH COMPLETE	12.2
10	30.73.006	3	1	PURLIN STND COMPLETE	94
11	30.73.025	2	1	PURLIN BIG TS COMPLETE	111
not shown	30.73.037	2	1	CABLE TS ROOF CONNECTOR	1.68
not shown	20.00.089	4	1	NAIL CONCRETE 3.0 IN	0.04
not shown	30.73.030	2	1	ANCHOR WINCH 2IN CW HOOK	10.2
not shown	30.16.213	2	1	STRAP 2 IN X 60 IN WITH EYE HOOK	2.98
not shown	40.38.220	1	1	ROOF TS 60 2 SHALLOW CAT	264
<b>Total lbs</b>	<b>53.10.061</b>			<b>TS 60 ADD-ON MODULE</b>	<b>832</b>

**NOTE:**  
 Diagonal Wall Cable, Diagonal Roof cable sets & "Connector plates" are required for every 5 Add-On modules attached to a basic module.

<b>tentnology co.</b>		
15427 66th Avenue Surrey B.C. Canada V3S 2A1 Tel: (604) 597-8368 Fax: (604) 597-8749 e-mail: tent@tentnology.com		
<b>TS60 Add On Module</b> General Arrangement		
Project: Techno Span	Scale: NTS	Sheet No.: 1 of 1
Dwg By: BRNS	Date: 20 Dec 05	File No.
Ck'd By:	App'd: <i>GN</i>	<b>53.10.061</b>